

PRODUCT DATA SHEET
Introduction

The ENVIRCO DCM-RSR offers leak-free performance in a compact room-side-replaceable module. Designed to be installed in either 1 1/2" or 2" TBar ceiling systems or gypsum/plaster wall board systems, initial installations and filter maintenance are simplified.

The ENVIRCO DCM-RSR offers:

- » Room side access for servicing and testing of filters, only the filter is replaced not the entire assembly. Replacement is fast and clean minimizing process down time.
- » A gel seal technology eliminating air bypass between the filter and the housing.
- » A light-weight low profile design that allows installation in a limited space. The frame is constructed of extruded aluminum profiles joined at the corners with Klip-Lock™ mechanism to promote unit strength and integrity.
- » An offset housing knife-edge that interfaces with the filter gel channel for a reliable leak free seal.
- » A chamfered receptacle along the room side opening that forms a flush, continuous mating surface that is free of gaps and architecturally pleasing.
- » An adjustable room side diffusion disc to promote uniform airflow across the entire filter and allow for air balancing.
- » Stainless steel mounting hardware for life long integrity.
- » Available with 10" or 12" ducted collar connections. The collars have an integral raised ridge to aid in securing flexible duct connection. Seismic tables are standard.
- » A choice of filter efficiencies from 99.99% and 99.9995% (supplied separately). Replaceable filters are minipleat design and offer low-pressure drop and promote air flow uniformity. Filters include a protective face screen and a damper adjustment access port.

The DCM-RSR is designed for installation in critical air quality applications including semiconductor manufacturing, pharmaceuticals, biotechnology, food processing, medical facilities, and laboratory or R&D facilities.


Performance


- » The filter shall be identified on a label indicating minimum efficiency, tested airflow and pressure drop. The unit shall be bar code serialized for individual unit identification.
- » The module shall be listed by Underwriters Laboratories as UL 900.

Warranty

- » Limited 1-year warranty.

Replacement Filters

- » Replacement filter elements (supplied separately) have gel seal channel for leak free sealing integrity. A chamfered flange along the room side creates an architecturally pleasing flush appearance from the room side of the module.

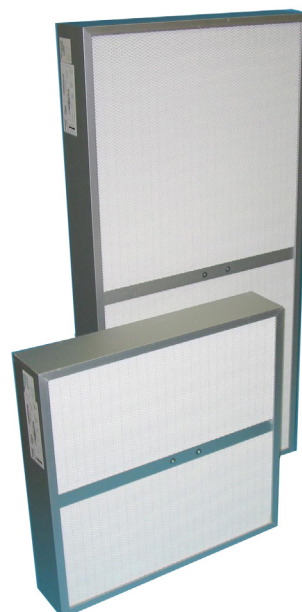

PRODUCT DATA SHEET

■ Performance Data

Dimension (inches)	Collar Dimensions (inches)	Shipping Weight Lbs.
W X L X H		
1.5" T-Bar		
23.62 x 23.62 x 5.37	10	34
23.62 x 23.62 x 5.37	12	34
23.62 x 35.62 x 5.37	10	40
23.62 x 35.62 x 5.37	12	40
23.62 x 47.62 x 5.37	10	50
23.62 x 47.62 x 5.37	12	50
2.0" T-Bar		
23.12 x 23.12 x 5.37	10	34
23.12 x 23.12 x 5.37	12	34
23.12 x 35.12 x 5.37	10	40
23.12 x 35.12 x 5.37	12	40
23.12 x 47.12 x 5.37	10	50
23.12 x 47.12 x 5.37	12	50

Please contact factory for additional options and configurations.

■ Specifications

General

- » Filter housing shall include anodized aluminum module, offset filter knife-edge for gel seal filter mating, stainless steel mounting hardware and adjustable air diffusion disc.
- » Sizes shall be as noted on drawings or other supporting materials.

Construction

- » Primary housing components shall be constructed of anodized aluminum framing material, aluminum back plate and aluminum diffusion disk. Unit shall be designed for installation into T-Bar ceiling grid or a gypsum/plaster ceiling.
- » The housing shall include a chamfered detail along the room side opening to receive a mating flange along the downstream side of the filter. The mating surface shall form a continuous flush fit free of gaps.
- » The housing shall include an offset knifeedge to interface with a gel seal filter.
- » Stainless steel mounting hardware shall facilitate convenient servicing of the module from the room side of the housing.
- » The housing shall include an integral diffusion disc that allows filter-to-filter balancing from room side of module without removal of the filter.
- » Housing shall be supplied with a ("10", "12")* collar for duct connection to air system. The collar shall include an integral continuous raised ridge to assist in securing flexible duct.

DATA NOTES:

'H' or Height dimension includes overall height of frame. Add 2" for duct connection collar.

Filters supplied separately.

